





# 500D Series LED Tube

LINEAR FLUORESCENT RETROFIT LAMP For: T8 and T12 lamp replacement

The Energy Focus 500D Series LED tube utilizes a direct-wire installation mode. The 500D includes circuitry that limits current input and directly connects to the main power, no longer requiring the ballast for normal operation, resulting in lower points of failure and removal of unnecessary hardware. In addition, the 500D Series provides a market surpassing efficacy of 150 lm/W.

### FEATURES AND BENEFITS

- Flicker-free LED lighting
- Non-shunted lamp holder required
- Integrated driver, Type-B (Direct-Wire)
- Replacement of existing tombstones
  recommended when retrofitting
- Single-ended power; INPUT end is electrically connected, other end has no electrical connections



Must use non-shunted lamp holders

For more information please see Accessories section.

©2020 Energy Focus, Inc. All Rights Reserved. Energy Focus, Inc. reserves the right to change specifications for product improvement without prior notice.



Length	2', 3' and 4' versions. Meets ANSI Standard			
Body	Oval extruded aluminum			
Lens	Polycarbonate lens			
Connection	Medium bi-pin (G13) end cap			
Input Voltage	100-277vac, 50/60hz			
Driver	Single end power; integrated LED driver			
Available colors	3500K 4000K 5000K			
CRI	>80			
Dimming	Non-dimmable			
Lifetime	L70 ≥ 60,000 hours			
Warranty	10-year warranty			
Environmental Requirements	Operating temp: -20° to 50°C Storage temp: -30° to 60°C Working humidity: 30% to 85% Storage humidity: 10% to 90% Non-corrosive environments			
Power Factor	>0.9			
Beam Angle	120°			



U.S. SAFETY - SAFETY, EMERGENCY & SUSTAINABILITY - WWW.USSAFETYSOLUTIONS.com - 510.356.6543





## **PRODUCT SPECIFICATION**

PART NUMBER	SIZE NOMINAL	POWER	LUMINOUS FLUX	UL PART NUMBER	DLC FAMILY
LEDFLT8-8XX-207-500F	(24") 2'	7W	1050lm	Same as part number	EAEEIH
LEDFLT8-8 <b>XX</b> -310-500F	(36") 3'	10W	1500lm	Same as part number	N/A
LEDFLT8-8 <b>XX</b> -411-500F	(48") 4'	11W	1650lm	Same as part number	QQQTDR
LEDFLT8-8 <b>XX</b> -415-500F	(48") 4'	15W	2250lm	Same as part number	MMMPDG
LEDFLT8-8 <b>XX</b> -420-500F	(48") 4'	20W	3000lm	Same as part number	RRRTQV
LEDFLT8-8 <b>XX</b> -420-500C	(48") 4'	20W	3000lm	Same as part number	RRRTQK


\*DLC Available in 2' and 4'

XX refers to the option for 3500K, 4000K or 5000K color temperature. (Replace XX with 35, 40 or 50 when selecting). Buy American Versions of 500D available, please contact Customer Support at 800-327-7877 for more information.

#### ACCESSORIES

- Single lampholder, no wires (model no. LEDFLSLH-G13NS-SBOG)
- Pair of two (2) lampholders, one with 3' wires (Model no. LEDFLSLH- G13NS-SNETGW)
- Single lampholder, with 3' wires (Model no. LEDFLSLH-G13NS-SBOGW)

## LINE DIAGRAM

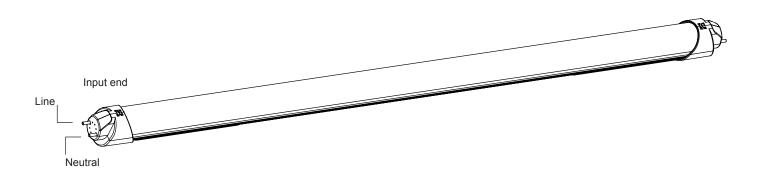

©2020 Energy Focus, Inc. All Rights Reserved. Energy Focus, Inc. reserves the right to change specifications for product improvement without prior notice.

