









RedCap® Emergency LED Lighting System

T8 EMERGENCY BATTERY BACKUP

For: T8 and T12 lamp replacement

The Energy Focus RedCap® Emergency
Battery Backup is an all-in-one general purpose
lighting and battery powered emergency backup
TLED solution. The tube acts as a normal
lamp, providing high lm/W and supporting on/
off switching operation. Upon loss of power, the
integrated batteries and emergency driver provide
a minimum of 90 minutes of light.

FEATURES AND BENEFITS

- The standard input end powers the lamp in normal mode, and the emergency input end charges the batteries and senses the presence of AC power. Batteries charge even when lamps are off.
- Emergency and standard fluorescent ballasts can be removed.
- Kit includes one lamp with two lampholders one with red rotor, one with green rotor.





Size	4' Oval extruded aluminum		
Body			
Lens	Polycarbonate lens		
Connection	Medium bi-pin (G13) end cap		
Input Voltage	120-277vac, 50/60hz		
Driver	Single end power; integrated LED driver		
Power Factor	>0.9		
Available colors	3500K 4000K 5000K		
CRI	>80		
Dimming	non-dimmable		
Lifetime	L70 ≥ 50,000 hours		
Warranty	5 Year		
Environmental Requirements	Operating temp: -20° to 40°C Storage temp: -20° to 30°C Relative humidity: 45% to 85% Non-corrosive environments		
Beam Angle	120°		
Battery Charge Power	3.5W (charging) <1W (battery full/standby)		

For more information please see Accessories section.

©2020 Energy Focus, Inc. All Rights Reserved. Energy Focus, Inc. reserves the right to change specifications for product improvement without prior notice.







PRODUCT SPECIFICATION


PART NUMBER	SIZE NOMINAL	POWER	LUMINOUS FLUX	UL PART NUMBER
LEDFLT8-8XX-411-BBUF	48" (4')	11W	1,540lm	3BD50116

XX refers to the option for 3500K, 4000K, or 5000K color temperature. (Replace XX with 35, 40 or 50 when selecting). For more options please contact Energy Focus at 800-327-7877

ACCESSORIES

- Battery Enable Jumper (p/n: EF-RC-JUMP)
- Emergency Test Switch (p/n: EF-RC-NCSW)

LINE DIAGRAM

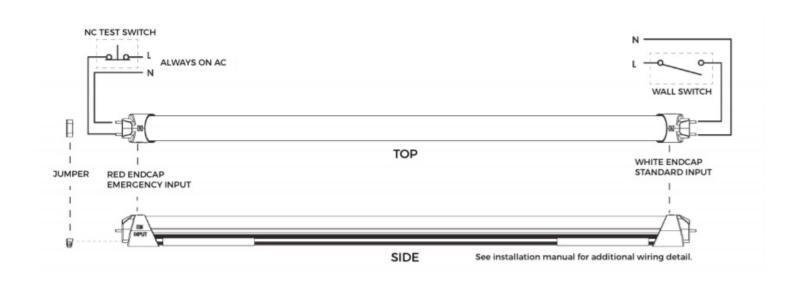

©2020 Energy Focus, Inc. All Rights Reserved. Energy Focus, Inc. reserves the right to change specifications for product improvement without prior notice.